



PASSION FOR POWER.

Compact Solutions DK Cable junction boxes

Cable trunking and conduit installation



For more information see www.hensel-electric.co.uk

 made in **GERMANY**
since 1931

ENYCASE[®]



DK Cable junction boxes

for normal environment and protected outdoor

For cable trunking and conduit installation

Cable entry via removable grommets

- Simply cut out cable trunking wall to the required width.
- Cables can be inserted from the front
- No threading of cables necessary!
- Supplied accessory: removable grommets DPS 02 (IP 54)
- The perfect installation solution for cable trunking!
- Gap closed: Removable trunking adapters for connection of cable trunkings to junction boxes.
- Stainless steel cover screws with quick fastening metric thread. Reducing cover fixing time.
- Material: polystyrene
- Burning behaviour: glow wire test in accordance with IEC 60695-2-11: 750 °C, flame-retardant, self-extinguishing
- colour: grey, RAL 7035
- Terminal box for equipotential bonding cables


DK Cable junction boxes
 cable entry via removable grommets
 for cable trunking and conduit installation



DP 9025
1.5-2.5 mm², Cu 3~

- with terminals
- 5-pole per pole 6 x 1.5 mm² sol, 4 x 2.5 mm² sol, 3 x 4 mm² sol
- for cable trunking and conduit installation
- included cable entry: 4 DPS 02, sealing range Ø 10-13,5 mm


rated insulation voltage	U _i = 690 V a.c./d.c.
material	PS (Polystyrene)



DP 9221
1.5-2.5 mm², Cu 3~

- with terminals
- 5-pole per pole 6 x 1.5 mm² sol, 4 x 2.5 mm² sol, 3 x 4 mm² sol
- for cable trunking and conduit installation
- included cable entry: 7 DPS 02, sealing range Ø 10-13,5 mm


rated insulation voltage	U _i = 690 V a.c./d.c.
material	PS (Polystyrene)



DP 9222
1.5-2.5 mm², Cu 3~

- with 2 terminals
- 5-pole per pole 6 x 1.5 mm² sol, 4 x 2.5 mm² sol, 3 x 4 mm² sol
- for cable trunking and conduit installation
- included cable entry: 7 DPS 02, sealing range Ø 10-13,5 mm


rated insulation voltage	U _i = 690 V a.c./d.c.
material	PS (Polystyrene)



DPC 9225
1.5-2.5 mm², Cu 3~

- FIXCONNECT® plug-in terminal technology
- 5-pole per pole 4 x 1 x 1.5-2.5 mm² sol/f, terminal technology, see annex DK Cable junction boxes
- for cable trunking and conduit installation
- included cable entry: 4 DPS 02, sealing range Ø 10-13,5 mm

rated insulation voltage	U _i = 690 V a.c./d.c.
rated current	32 A
material	PS (Polystyrene)




DK Cable junction boxes
cable entry via removable grommets
for cable trunking and conduit installation



DP 9020

- without terminals
- for cable trunking and conduit installation
- included cable entry: 4 DPS 02, sealing range Ø 10-13,5 mm


rated insulation voltage	$U_i = 690 \text{ V a.c./d.c.}$
material	PS (Polystyrene)



DP 9220

- without terminals
- for cable trunking and conduit installation
- included cable entry: 7 DPS 02, sealing range Ø 10-13,5 mm

rated insulation voltage	$U_i = 690 \text{ V a.c./d.c.}$
material	PS (Polystyrene)

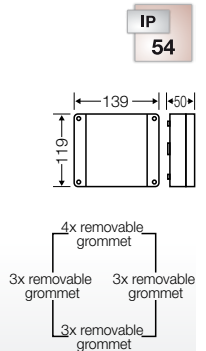

DPS 02
Removable grommet

- sealing range Ø 10-13.5 mm
- for retrofitting
- for cable junction boxes DP 9020, DP 9220, DP 9025, DP 9221, DP 9222, DP 9026, DPC 9225



ERA 20
Removable conduit adapter

- sealing range Ø 10-13.5 mm
- for wiring conduits M 20
- for cable junction boxes DP 9020, DP 9220, DP 9025, DP 9221, DP 9222, DP 9026, DPC 9225



EKA 20
Removable trunking adapter

- sealing range Ø 10-13.5 mm
- for mini trunking up to 20 x 20 mm
- for cable junction boxes DP 9020, DP 9220, DP 9025, DP 9221, DP 9222, DP 9026, DPC 9225



Hensel Electric UK LTD.
Industrial Electrical Power Distribution Systems



Ground Floor
 Unit 5
 Anglo Office Park
 Lincoln Road
 High Wycombe
 HP12 3FU
 United Kingdom

Phone: 03450 66 00 55
 Fax: 03450 66 00 56
 sales@hensel-electric.co.uk
 www.hensel-electric.co.uk